


MIXING

- Bottom and helix made of wear resistant STEEL HB400
- Rounded fixed safety grill complete with bag breaker
- Electric valve, hydraulic hoses + electric connection kit
- Attachment to the machine



MIXER BUCKET WITH CENTRAL DISCHARGE

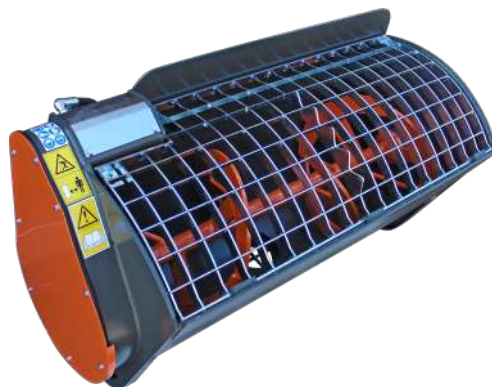

- Welded helix made of wear steel HB400
- Unloading pipe 1500mm length
- Sintered steel seal group

Suitable for any type of earth moving machine:

Skid loader	_____	150/200/250/350/450
Backhoe loaders-Compact wheel loaders	_____	BM450/600/700
Wheel loaders	_____	BM1100/1500/2000
Telehandlers	_____	2,0/2,5 t BM350/450 3,0/3,5 t BM600 >4,5 t BM700
Excavators	_____	starting from 3,5 t

MIXER BUCKET WITH SIDE DISCHARGE



- Bolted helix made of wear steel HB400
- Hydraulic motor fully protected
- Unloading pipe (length 1500mm)
- Bolted attachment as standard supply, starting from the class 3 models
- Polyurethane seal group

Suitable for any type of earth moving machine:

- Skid loader _____ BM100/150/200/250/330/400SL
- Backhoe loaders-Compact wheel loaders _____ BM400/500/600SL
- Wheel loaders _____ BM700/1100SL
- Telehandlers _____ 2,0/2,5 t BM250/330/400SL
 3,0/3,5 t BM500/600SL
 >4,5 t BM700SL
- Excavators _____ starting from 3,5 t


TWIN DOOR MIXER BUCKET



- Bolted helix made of wear steel HB400
- Hydraulic motor fully protected
- Unloading pipe (length 1500mm) and side chute
- Bolted attachment as standard supply, starting from the class 3 models
- Polyurethane seal group

Suitable for any type of earth moving machine:

- Skid loader _____ BM150/200/250/330/400TD
- Backhoe loaders-Compact wheel loaders _____ BM400/500/600TD
- Wheel loaders _____ BM700/1100TD
- Telehandlers _____ 2,0/2,5 t BM250/330/400TD
 3,0/3,5 t BM500/600TD
 >4,5 t BM700TD
- Excavators _____ starting from 3,5 t

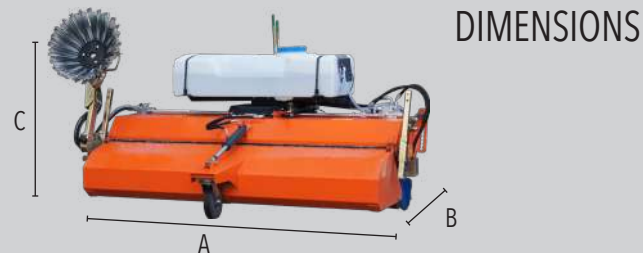

DIMENSIONS

		BS 200 DS	BS 230 DS	BS 260 DS	BS 280 DS
A	Width	2230	2530	2830	2990
B	Depth	1850	1850	1850	1850
C	Height	1200	1200	1200	1200

The Sweeper bucket M3 series DS is designed for customers who work both in the field of cable or phone laying sectors as well as road maintenance.

It can be fitted to any kind of wheel-loader, back-hoe-loader, telescopic and is equipped with collecting bucket hydraulic operated - PPN brush Ø 660 mm., no. 3 support wheels 250x60 mm, hydraulic hoses, integrated motor, self-leveling attachment (optional) and mechanical working angle adjustment.

OPTIONALS

	Overflow valve	Side brush right or left Ø 600 mm in PPN and STEEL
Solenoid valve kit to operate the hydraulic adjustment (if the machine is not equipped with 2 hydraulic lines)	Water tank 200 l with electric pump and nebulizers	Hydraulic working angling adjustment (an additional hydraulic line is required)
Nebulizer kit (without tank)		





MODEL	BS 200 DS	BS 230 DS	BS 260 DS	BS 280 DS
Working width [mm]	2000	2300	2600	2800
Working width with 20° angle [mm]	1880	2160	2440	2600
Required oil flow (for 160bar) [l/min]	40	40	50	50
Ø Brush [mm]	660	660	660	660
Weight with collecting bucket [kg]	575	610	644	661
Capacity of collecting bucket [kg]	315	361	407	431

